




Anand Nagar, Krishnankoil - 626126, Srivilliputtur (via), Virudhunagar District, Tamilnadu.

APPLICATION FOR ADMISSION TO Ph.D. PROGRAMMES

Date of Application:12-06-2020

Department	COMPUTER SCIENCE AND ENGINEERING	Application No.	20200071
Area of Research	NETWORKS	Research Mode	PART TIME

Name :NITHYA.D
Date of Birth / Age :14-11-1987 / 32 Years
Gender :FEMALE
Category :MBC
e-Mail ID :nithu.1026@gmail.com
Mobile :8940751705



Father's/Husband's Name	THIRUKUMARAN.V	Father's/Husband's Occupation	BUSINESS
Family Income	1,80,000	Residential Type	RURAL
Birth Place	AUNDIPATTY	Mother Tongue	TAMIL
Religion	HINDU	Martial Status	MARRIED
Aadhaar No.	312762378002	PAN No.	ATVPN8020F
Physically Challenged	NO	Type of Disability	-
Address for Communication: 3-W/199 MIDDLE STREET AUNDIPATTY THENI DISTRICT TAMILNADU INDIA Pin-625512		Permenant Address: 3-W/199 MIDDLE STREET AUNDIPATTY THENI DISTRICT TAMILNADU INDIA Pin-625512	

Qualification						
Degree	Discipline	College/university	Year Passed	AVG/CGPA	Class	Mode
M.TECH	CSE	KALASALINGAM UNIVERSITY	2015	8.9 CGPA	FIRST	REGULAR
B.E	CSE	RVS COLLEGE OF ENGINEERING	2011	77.7%	FIRST	REGULAR

Experience				
Organization	Designation	Experience From	Experience TO	Work Nature
MANGAYARKARASI COLLEGE OF ENGINEERING	AP	2015-08-03	2017-05-09	TEACHING
THENI KAMMAVAR SANGAM COLLEGE OF TECHNOGY	AP	2017-07-17	2020-06-12	TEACHING

Payment Details				
Transaction ID	Reference	Date of transaction	Amount	Status
20200071_200618114124	SHMP8909185126	18-06-2020	600	SUCCESS

MULTIHOP ROUTING WITH BANDWIDTH ALLOCATION IN WIRELESS MESH NETWORKS

Abstract—: Wireless mesh network is in the form of mesh topology, it can be connected through wireless access points. The network user is used for forwarding the data to the next node. In this paper, we propose the problem of identifying the maximum available bandwidth path to support the high throughput service flows and high reliability. Using new path weight with DCOR can limit the over consuming of the network resource. The congestion control can be optimized using MORE protocol. We also prove that the multihop routing techniques also satisfies the consistency and loop freeness requirements. In this simulation also prove that each node in the network makes a proper packet transmission and to support low latency service transmission flows in wireless mesh networks.

*Keywords—*component; wireless mesh networks; mesh topology; MBP; DCOR; MORE

I. INTRODUCTION

The wireless mesh networks consists of multiple number of nodes in it. To achieve the effective communication through the principle of routing protocol. They can follow the number of mechanisms in order to forward the packet. The mobility of nodes in the network causes convergence in mobile ad hoc networks. This leads to heavy traffic in mesh network, so they require the load balancing routing schemes.

To achieve these requirements, the literature survey focuses on design the routing metrics for wireless mesh networks [1][2]. To provide the efficient Quality-of-service is essential for finding the path in the network. Normally, the mesh network consists of large number of paths in it. In order to find the maximum available bandwidth path, the routing metrics are introduced. The problem of identifying the available bandwidth path using the term Bandwidth Constrained Routing problem(BCRP)[17]. Then finding the bandwidth path between the source and destination in wireless mesh networks is complicated due to the transmission of interference. In the wireless networks, there are two types of interference are there. They are interflow interference and interflows interference [1]. The interflow interference refers to the neighbouring routers that share the same flow path. It can reduce the interference at the inter flow level and it competing for the same busy channel. Alternatively, intraflow interference refers to the interference between the intermediate routers along the same flow path. Interflow interference is difficult to find the widest paths in the case of hop-by-hop manner routing protocol. The problem of identifying the widest path is still not solved.

In this work to perform routing in the 802.11 based wireless mesh networks and they make the following aid in it.

1. To propose the new path weight algorithm that captures the available bandwidth. It gives the mechanism to compare two paths based on the new path weight as left-isotonic[4].

2. Then to construct the routing table and distance table and to built up a hop-by-hop packet forwarding scheme. And it also satisfies the optimality and consistency requirements[8].

On the other hand, Delay Constrained Opportunistic Routing (DCOR) Protocol a new routing protocol is suitable for wireless mesh networks well again. DCOR not only improve the reliability and to reduce the possibility of reduplicate packets. DCOR methods is similar to NCOR[19], as they can be optimized using MORE (MAC Independent Opportunistic Routing and Encoding protocol)[18] in order to send encoded packets. Moreover, MORE protocol is a new method based on ExOR method. They can be operated based on the encoding form to achieve the better performance in wireless mesh networks.

Alternatively, opportunistic routing protocol methods improves the transmission rate over multicast routing forwarders in wireless mesh networks. MORE protocol aspects of following problems such as:

1. As the increase of message load the network collision may occur, causes hidden terminal problems.

2. The end-to-end delay latency is difficult due to MAC access procedure form.

3. Due to data collision, the network throughput decreases rapidly in it leads to the network load exceeds the peak.

The rest of this paper describes the hop-by-hop routing protocol with DCOR technique. Normally, the DCOR with new path weight algorithm could increase the throughput of the network and also favour for congestion control. Due to this emerging techniques causes low link probability in wireless mesh network. The increase of throughput in the wireless mesh network can automatically enhance the overall performance of the network. But, this combinatorial protocol is independent of MAC layer. Moreover, the tool NS2 can be utilized to simulate the model of this paper.

II. RELATED WORKS:

In order to identify the maximum available bandwidth path, several metrics are introduced[1]. These metrics compute the minimum or maximum available bandwidth paths in it. Some of the metrics are introduced, they are ETX, WCETT and so on[5]. The ETX refers to the most essential one such that to compute the number of data transmission in order to send the packet over the network link[6]. The ETT is another version for the previous metrics. Its mainly concentrated on the packet size in it. In this work, we propose the single channel wireless mesh network and data rates of all the network links are the same[8]. Normally in a hop-by-hop routing protocol consists of large number of relay nodes between the source and destination. Using, this the packets are transferred through the routing techniques[5]. The routing protocol can have the forwarding character its favour

for transmitting the packet from source and the decide destination[12].

Some existing Qos routing protocol such as DCOR with the combination of new path weight algorithm do the computation of maximum available bandwidth path with the efficient congestion control system[17][19]. Based on the number of hops in a network the path can be constructed. The routing metrics can be introduced in this paper. It is helpful to find the widest path among the various links. Then we consider the DCOR (Delay Constrained Opportunistic Routing) methods have the high throughput and effective congestion control system[18]. They also do the multi-type services and the traffic flows transmit based on the 802.11 series with the MAC protocols[5]. The protocol such as MORE can be used to optimize the congestion control system. The DCOR specify the broadcasting nature of MAC protocol with low latency service transmission in wireless mesh networks[19]. The metrics such as iAWARE,IRU protocols can be applicable for interference links in wireless mesh networks. The MAC protocol such as named 802.11Ext of NS2;it sends encoded packets via the broadcast channel and batch acknowledgement through the widest paths of the wireless mesh networks[15].To achieve the bandwidth computation using the scheduling mechanisms[4]. Our main goal is to transmit the packet via the widest path and also have the effective congestion control system.

Author describes the review for the Qos support routing protocol[1][2][6]. The cross-layer mechanism describes the computation of 802.11 MAC protocol. Therefore, our routing protocol can be easily incorporate the current wireless devices[15].

III.PROPOSED WORK:

In the proposed work to increase the throughput and also satisfies the consistency and loop-freeness requirement. For that purpose we introduced the combination of new path weight algorithm with DCOR technique.

Normally, in the wireless mesh networks consists of large number of nodes. So we have to concentrate on the throughput in order to send the packet from source to destination.

Moreover, problems are faced when the packets are send from one neighbour node to the other. For this reason to introduce the routing protocols in our proposed work.It is important to produce the efficient Quality-of-service in this type of networks. In this model, the available path bandwidth denotes the widest path n it. Therefore in this paper mainly focused on finding the Maximum available Bandwidth Path (MBP)[1]. In addition to the opportunistic routing protocols can be used to control the congestion among the multiple paths and gives the high reliability.

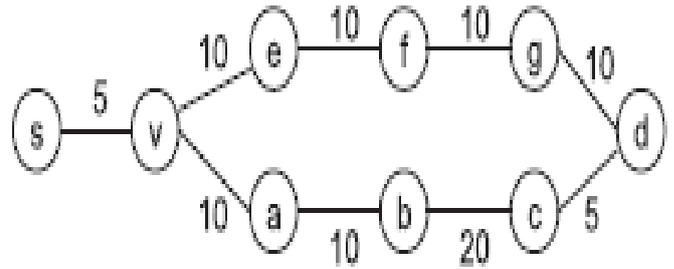


Fig 1:Mesh Topology

A.Path selection

The path selection can be achieved by distance-vector mechanism. In those mechanism, the nodes has to advertises of its own best available paths to all its neighbour nodes. The figure explains the path selection mechanism. Each node in the network has its own perspective. Then, node has to identify the widest paths. In the case of MORE protocol, based on the path weight algorithm they transmit the packet to the destination through the next-hop neighbouring nodes in it. And the batch ACK return to the source from the destination, these activities can be done using the unicast channel access. For example fig.1 shows the computation of choosing the widest paths from source to destination.

B.Isotonic path weight calculation

In order to achieve consistency and loop-freeness requirements, the path calculation can be apply to find the widest paths between all the intermediate nodes. Let as gives the definition of left-isotonicity property.

Left-isotonicity:The quadruplet $(S, \oplus, \omega, \geq)$ is left-isotonic if $\omega(a) \geq \omega(b)$ implies $\omega(c \oplus a) \geq \omega(c \oplus b)$,for all $a,b,c \in S$, where s is a set of paths, \oplus is the path concatenation operation, ω is a function which maps a path to a weight, and \geq is the order relation.

Using this condition the path calculation can be done. These principles able to find the maximum available bandwidth path through the use of metrics and parameters. To achieve efficient routing by the applicable of routing protocols. The concept of finding the widest path to transmit the packet from source to the destination is called as composite available bandwidth path(CAB). The path with the absence of dominating path is represented as non-dominated path in the network.

C. Constructing table

The table construction is essential for the routing scheme. Using the isotonic path weight calculation results improve the routing protocols efficiency in it. The path calculation gives the maximum available bandwidth paths. Through the non-dominated paths, they illustrate the routing information to all its neighbours. The transmission of packets which carries the path information is the route packet. Normally, the route packet consists of the following information as NF(P)-first hop neighbor node,NS(P)-second hop neighbor node,NT(P)-

third hop neighbor node. These parameters represent the first next-hop, second next-hop and the third next-hop neighbours. Here, each node in the network consists of two tables as routing table and distance table. The distance table consists of the non-dominated path information and the routing table describes the QoS routing protocols. Suppose in the fig.1 represents the node s advertises u as the non-dominated paths, and removes the dominated path from p .

D. Forwarding the packet

After consider the calculation mechanism, to forward the packet across the widest path from source to destination. The source node s wants to transmit the packet to d , they makes the path information as $p = \langle s, v_1, v_i, \dots, v_n, d \rangle$. Each node in the network makes a consistent decision to forward the packet. Through the next-hop path information they starts their transmission. The *Routing Field* which carries the next four hops information. In the packet forward mechanism each intermediate node to make the perfect route decisions by using the results of routing tables. The route decision can be made by hop-by-hop manner mechanism.

We can also consider the MORE protocol the packet transmission can be done over by routing metrics as (ETX) Expected transmission count. Based on the candidate forwarding set value the packet starts their transmission.

The algorithm explains the process of MORE protocol. This process can be worked based on the sliding window concepts. When they satisfy the condition with new path weight algorithm, they automatically are forwarding the packet to its destination through the intermediate nodes in it.

E. Updating route

It is the final stage of the network process. Sometimes, the network finds the new flow with the maximum available bandwidth path. They suddenly release their existing path and start the transmission with the new flows of the network. The updating process can be done by the routing protocol of DSDV. They can operate based on the sequence number. This method can easily distinguish their available paths. The mechanism of CBR traffic can be introduced to determine the network flows in it. By the use of MORE protocol, the sliding window process with the sequence number can easily update the network process mechanism.

IV. RESULTS AND DISCUSSIONS

SIMULATION SETUP

In this project, to implement the new path weight algorithm with DCOR exhibits the high throughput performance. For this purposes, to setup the NS2 simulation as,

Channel type	Wireless channel
Propagation model	Two ray ground

Network interface type	Physical interface
Layer	MAC
No of nodes	70
Routing protocol	AODV
x-dimension	1000m
y-dimension	1000m
Transmission range	300
Simulation starts time	1.0s
Simulation ends time	214s

Table.1 Simulation Settings

SIMULATION PARAMETERS

The simulation focuses on some of the network properties such as:

1. Throughput
2. Packet delivery ratio
3. End-End Delay
4. Data Packet Forwarding Overhead

The throughput is analyzed with time. The other parameters are analyzed with various numbers of nodes such as 25 nodes, 50 nodes, 75 nodes and 100 nodes.

SIMULATION RESULTS I

In this simulation scenario, the network throughput can be increased with the applicable of DCOR protocol in path weight algorithm. It shows the better performance than the existing routing protocols.

The figure explains the network throughput is plotted as packet received with respect to time. Due to the combination of path weight algorithm with DCOR. The throughput of the wireless network increases significantly. The main reason of this results due to the high packet delivery ratio and packet drop is comparatively less.

Here, the vertical line denotes the packet received values. The horizontal line denotes the time with respect to packet received ratio.

The overall network throughput is increased gradually by using the simulation setup.

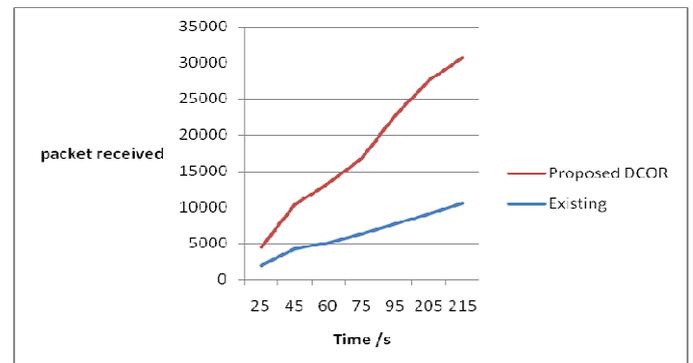


Fig 2. packet received versus time

SIMULATION RESULTS II

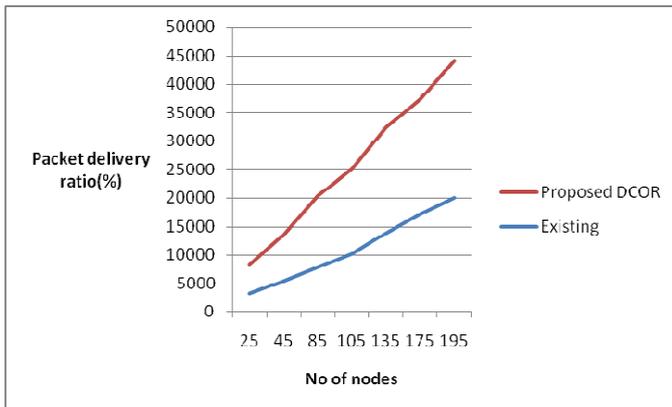


Fig 3.packet delivery ratio versus no of nodes

The packet delivery ratio is plotted against the number of nodes. Also they compare the ratio of existing with proposed DCOR method. It is efficient when compared to previous method.

The overall delivery ratio can be increased gradually in this simulation setup.

V.CONCLUSION

In this paper, we studied the problem of discover the maximum available bandwidth path in wireless mesh networks. So, we can implement the new path weight algorithm with DCOR for the widest path. The new path weight algorithm follows the left-isotonicity property which supports proactive hop-by-hop routing protocol and also satisfies the consistency and optimality requirements.

Based on the high bandwidth requirements, a source can immediately transmits the packet with the high throughput performance.To test out protocol performance under different scenarios.


And the DCOR technique can improve the transmission of the multiflows networks. They also satisfy the load of network conditions and the congestion control can also be handled.

REFERENCES

[1] Szymon Chachulski, Michael Jennings, Sachin Katti, Dina Katabi, Trading Structure for Randomness in Wireless Opportunistic Routing, MIT CSAIL Technical Report(February 23, 2007).
 [2] Q. Zhang and Y.-Q. Zhang, "Cross-Layer Design for QoS Support in Multihop Wireless Networks," Proc. IEEE, vol. 96, no. 1,pp.234-244, Jan. 2008.
 [3] C.-Y. Chiu, Y.-L. Kuo, E. Wu, and G.-H. Chen, "Bandwidth-Constrained Routing Problem in Wireless Ad Hoc Networks,"IEEE Trans. Parallel and Distributed Systems, vol. 19, no. 1, pp. 4-14,Jan. 2008.

[4] X. Cheng, P. Mohapatra, S.-J. Lee, and S. Banerjee, "MARIA: Interference-Aware Admission Control and QoS Routing in Wireless Mesh Networks," Proc. IEEE Int'l Conf. Comm. (ICC '08), pp. 2865-2870, May 2008.
 [5] J. K. Sundararajan, D. Shah, M. Medard, M. Mitzenmacher, and J. Barros, Network Coding Meets TCP, in Proc. of IEEE INFOCOM, 2009.
 [6] CodeOR: Y. Lin, B. Li, and B. Liang. CodeOR: Opportunistic routing in wireless mesh networks with segmented network coding. In Proc. Of IEEE ICNP, 2008.
 [7] Yunfeng Lin, Baochun Li, Ben Liang, CodeOR: Opportunistic Routing in Wireless Mesh Networks with Segmented Network Coding, IEEE Conference(2008).
 [8] Y. Yang and J. Wang, "Design Guidelines for Routing Metrics in Multihop Wireless Networks," Proc. IEEE INFOCOM, pp. 2288- 2296, Apr. 2008.
 [9] M. Genetzakis and V.A. Siris, "A Contention-Aware Routing Metric for Multi-Rate Multi-Radio Mesh Networks," Proc. Fifth Ann. IEEE Comm. Soc. Conf. Sensor, Mesh and Ad Hoc Comm. And Networks (SECON '08), pp. 242-250, 2008.
 [10] Y. Yang and R. Kravets, "Contention-Aware Admission Control for Ad Hoc Networks," IEEE Trans. Mobile Computing, vol. 4, no. 4, pp. 363-377, Apr. 2009.
 [11] H. Li, Y. Cheng, C. Zhou, and W. Zhuang, "Minimizing End-to- End Delay: A Novel Routing Metric for Multi-Radio Wireless Mesh Networks," Proc. IEEE INFOCOM, pp. 46-53, Apr. 2009.
 [12] Dimitrios Koutsonikolas, Chih-Chun Wang, Y. Charlie Hu, CCACK: Efficient Network Coding Based Opportunistic Routing Through Cumulative Coded Acknowledgments, IEEE INFOCOM (2010).
 [13] Yunfeng Lin Ben Liang Baochun Li. SlideOR: Online Opportunistic Network Coding in Wireless Mesh Networks INFOCOM, 2010 Proceedings March 2010, p. 1-5.
 [14] T. Liu and W. Liao, "Interference-Aware QoS Routing for Multi- Rate Multi-Radio Multi-Channel IEEE 802.11 Wireless Mesh Networks," IEEE Trans. Wireless Networks, vol. 8, no. 1, pp. 166- 175, Jan. 2010
 [15] Hariharan Rahul, Haitham Hassanieh, and Dina Katabi, SourceSync: A Distributed Wireless Architecture for Exploiting Sender Diversity, SIGCOMM Conference 2010 (August 30-September 3), New Delhi, India.
 [16] The Network Simulator—ns2, <http://www.isi.edu/nsname/ns>, 2011.
 [17] Ronghui Hou, King-Shan Lui, Fred Baker, and Jiandong Li, Senior Member, IEEE, "Hop-by-Hop Routing in Wireless Mesh Networks with Bandwidth Guarantees" IEEE TRANSACTIONS ON MOBILE COMPUTING, VOL. 11, NO. 2, FEBRUARY 2012.
 [18] Zhi YIN a,_, Mi WENa, Chunming YEb, "Opportunistic Routing Protocols in Wireless Ad Hoc Networks Using Directional Antennas" Journal of Information & Computational Science 9: 15 (2012) 4461-4466
 [19] Zhang Sanfeng1, Li Shuang2, Huang Di2, Member,IEEE, "MAC Independent Routing Methods for Multi-SeSupportting Wireless Mesh Networks" 978-1-61284-683-5/12/2012 IEEE

Sl. No: 151017

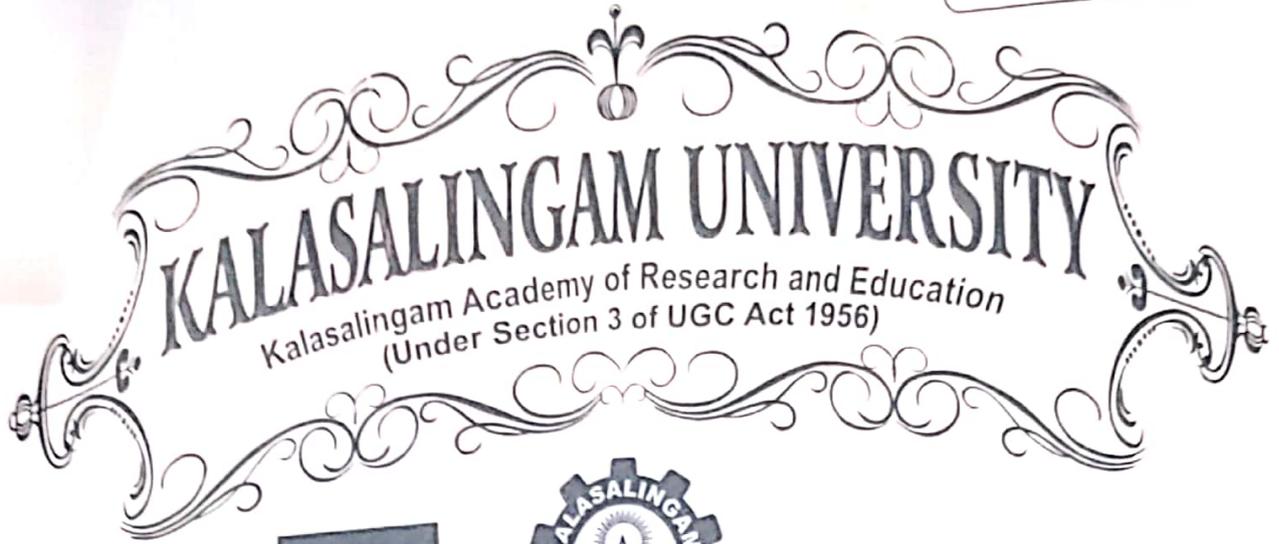

Register No: 9913104005

The Board of Management of the Kalasalingam University, hereby makes known that

Ms./Mr. NITHYA D has been admitted to the

Degree of Master of Technology in Computer Science and Engineering

he / she having been certified by duly appointed examiners to be qualified to receive the same

and having been placed in the First Class with Distinction

at the examination held in Apr/May 2015

Given under the seal of the University



Anand Nagar,
Krishnankoil - 626 126,
Tamil Nadu, India

M. Rajan

[Signature]

[Signature]

Date: 29/08/2015 Controller of Examinations

Registrar

Vice - Chancellor

KALASALINGAM UNIVERSITY

(Kalasalingam Academy of Research and Education)
(Under Section 3 of UGC Act 1956)



SI No 98990015

Anand Nagar
Krishnankoil - 626 126
Tamil Nadu, INDIA

M.Tech Degree Examinations CONSOLIDATED GRADE CARD

Name of the Student: NITHYAD

Register No: 9913104005

Branch: Computer Science and Engineering

Batch: 2013-2015

SEM	COURSE CODE	NAME OF THE COURSE	ATT. CODE	CREDITS	GRADE	MONTH & YEAR OF PASSING
CGPA COURSES						
1	CSE5001	Advanced Data Structures and Algorithms	H	3	A	Nov/Dec 2013
1	CSE5002	Distributed Computing	H	3	S	Nov/Dec 2013
1	CSE5003	Advanced Networks	H	3	A	Nov/Dec 2013
1	CSE5004	Advanced Operating Systems	9	3	S	Nov/Dec 2013
1	CSE5011	Theory of Computation	H	3	A	Nov/Dec 2013
1	CSE5081	Advanced Operating Systems Laboratory	9	1	S	Nov/Dec 2013
1	CSE5082	Distributed Systems Laboratory	H	1	S	Nov/Dec 2013
1	CSE6005	Data Mining	9	3	A	Nov/Dec 2013

2	CSE5006	Advanced Computer Architecture	8	3	A	Apr/May 2014
2	CSE5007	Object Oriented System Design	H	3	A	Apr/May 2014
2	CSE5009	Advanced Databases	9	3	A	Apr/May 2014
2	CSE5083	Object Oriented System Design Laboratory	H	1	S	Apr/May 2014
2	CSE5084	Databases Laboratory	9	1	S	Apr/May 2014
2	CSE5104	Network Security	H	3	A	Apr/May 2014
2	CSE6007	Mobile Adhoc Network	H	3	A	Apr/May 2014
2	CSE6008	Cloud Computing	9	3	A	Apr/May 2014

3	CSE6001	Soft Computing	9	3	A	Nov/Dec 2014
3	CSE6004	Software Architecture	9	3	A	Nov/Dec 2014
3	CSE6006	Wireless Sensor Networks	H	3	A	Nov/Dec 2014
3	CSE6098	Project Phase-I	8	6	B	Nov/Dec 2014

4	CSE6099	Project Work Phase - II	9	10	B	Apr/May 2015


CGPA CREDITS

EARNED	TOTAL TO BE EARNED	CGPA	CLASS AWARDED
65	65	8.91	First Class with Distinction

Please see overleaf for details

Place: Krishnankoil

Date: 06/06/2015



M. Pranjana
Controller of Examinations



Serial No.: 9196

KALASALINGAM UNIVERSITY

(Kalasalingam Academy of Research and Education)

(Under Section 3 of UGC Act 1956)

(Accredited by NAAC with B Grade with a CGPA of 2.81)

Anand Nagar, Krishnan Koil - 626 126

Srivilliputtur (Via), Virudhunagar (Dt), Tamil Nadu, India

TRANSFER CERTIFICATE

1. Name of the pupil : NITHYA D
2. Date of Birth : 14/11/1987
3. Nationality, Religion and Caste : Indian, Hindu and Thottiyayanayakar
4. Date of joining to the university : 3/8/2013
5. Course details
 - a) Registration no. : 9913104005
 - b) Degree : M.Tech
 - c) Specialization : Computer Science and Engineering
 - d) Batch : 2013 - 2015
6. Whether qualified for promotion to a higher class : Yes (Refer the Grade Sheet)
7. Is there any break during the studies (if so specify the period) : No
8. Whether the pupil has paid all the fees to the University : Yes
9. Date on which application for TC was made : 30/4/2015
10. Date on which actually the pupil left the university : 9/4/2015
11. Medium of instruction : English

Date : 30/4/2015



REGISTRAR



MANGAYARKARASI COLLEGE OF ENGINEERING

7-1-139, 1st Street, Mangayarkarasi Nagar, Paravai, Madurai - 625 402.

Ph.: 0452-2668635, 2665455, Fax : 0452 - 2665454

Approved by AICTE F.No. 37/3 / Legal / 2012 dt : 27/09/2012

Affiliated to Annauniversity, Chennai

E-mail : mangal.enggccoll@gmail.com

Website : www.mce-madurai.org

Dr. R.Sivasubramanian, Ph.D.,
Principal

Mobile No. : 99441 48446

Email : sivaprincipal@gmail.com

sivaprincipal2017@gmail.com

Lr. No. MCE/Estt./Cer./16-17

Date :
03.05.2017

EXPERIENCE CERTIFICATE

This is to certify that Mrs. D. Nithya is worked as Assistant Professor in the Department of Computer Science and Engineering of our College during the period from 03.08.2015 to 03.05.2017. She is relieved from her duties on her own accord.

During that period, her conduct and character are GOOD.



R. Sivasubramanian
Principal 3/5/17

Mangayarkarasi College of Engineering
Mangayarkarasi Nagar, Paravai
Madurai-625 402

आयकर विभाग

INCOME TAX DEPARTMENT


NITHYA D

DHANASEKARAN

14/11/1987

Permanent Account Number

ATVVPN8020F

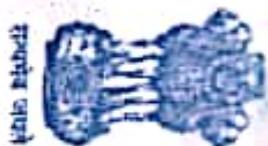

भारत सरकार

GOVT. OF INDIA

[Handwritten signature]

Signature





இந்திய தேர்தல் ஆணையம்
வாக்காளர் அடையாள அட்டை
ELECTION COMMISSION OF INDIA
IDENTITY CARD

NNH0516476



வாக்காளர் பெயர் : நித்தியா

Elector's Name : Nithya

தந்தை பெயர் : தனசேகரன்

Father's Name : Dhanasekaran

பாலினம் / Sex : பெண் / Female

பிறந்த தேதி / Date of Birth: 14/11/1987

R. Dis. 97/2002 dt

GCP(ET3)-26-5-4,74,300 Cps -10-5-99

MBC

சான்றிதழ் எண்
Certificate No

1926373



மாவட்டக் குறியீடு எண்
District Code

வட்டக் குறியீடு எண்
Taluk Code

கிராமக் குறியீடு எண்
Village Code

2	9	
0	3	
0	1	2

சாதிச் சான்றிதழ்
COMMUNITY CERTIFICATE


இனி மாவட்டம் திருச்சூர் வட்டம்
தென்பட்டி கிராமம்/நகரம், திரு / திருமதி / செல்வி
செல்வன் குந்தியா குந்தியா தகப்பனார்/கணவர்
பெயர் குந்தியா
குந்தியா - தென்பட்டி நகரம்

வகுப்பைச் சார்ந்தவர், அரசு ஆணை நிலை எண் 28 பிற்பட்ட மற்றும் மிகவும் பிற்பட்ட பிரிவின் நலத்துறை நாள் 19-7-1994 வரிசை எண் 178 படி மிகவும் பிற்பட்ட பிரிவினைச் சார்ந்தவர் எனச் சான்றளிக்கப்படுகிறது.

This is to certify that Nithya Son / Daughter of Thiru Dhanasekaran of Theppanpatty Village / Town, Aundipatty Taluk, Theni District of the State of Tamil Nadu belongs to Hindu - Thokkiya Naicker Community, which is recognised as a Most Backward Class as per Government Order (Manuscript Series) No. 28, Backward Classes and Most Backward Classes Welfare dated 19th July 1994, vide Serial No. 178.

2. திரு / திருமதி / செல்வன் / செல்வி குந்தியா என்பவரும் அவருடைய குடும்பத்தினரும் தமிழ்நாட்டில் இனி மாவட்டத்தில் திருச்சூர் த்தில் திருச்சூர் கிராமத்தில் / நகரத்தில் வசித்து வருகிறார்கள் எனச் சான்றளிக்கப்படுகிறது.

2. It is certified that Thiru/Mr/Selvan/Selvi Nithya and his/her family ordinarily reside(s) at T. Adagapuri Village/Town Aundipatty Taluk Theni District of Tamil Nadu

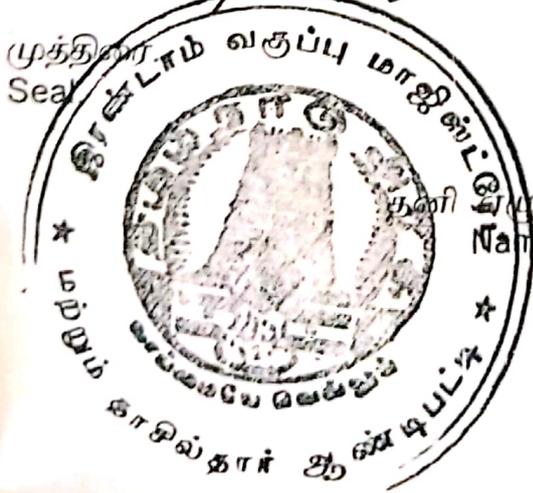

கையொப்பம்
Signature

நாள்
Date

தனி பெயர்
Name in Capital Letters

பதவிப் பெயர்
Designation

செல்வன்
தலைமையிடத்து துணை வட்டாட்சிப்
ஆண்டிப்படி
செல்வன்

ANNEXURE-I

CERTIFICATE FROM THE ORGANISATION WHERE THE CANDIDATE IS EMPLOYED

Certified that Mr./Ms./Mrs. NITHYA.D is employed as ASSISTANT PROFESSOR (Designation) in the DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING (Department/Division Name) of THE NI KAMMAVAR SANGAM COLLEGE OF TECHNOLOGY (Institution/Industry Name).

We have no objection in forwarding his/her application for the Ph.D. Research Programme.

FOR FULL TIME:

The candidate will be sanctioned leave for the duration of the research programme and will be relieved from duty from _____ to _____ to undertake the full time research work in the University.

FOR PART TIME:

The candidate will be permitted to undertake part time study in the University/College and will be allowed to be present for discussions with the supervisor, attending course works, conduct of experiments and participations in seminars and related presentations. Further the required facilities at our organization will also be provided to the candidate for doing research.

Date: 18.06.20



Signature of the Head of Organization with office seal

Dr. D. NAGARATHINAM, M.E., Ph.D.,
Principal
The Ni Kammar Sangam
College of Technology
Koduvilarpatti, THENI - 625534